


POSTE CURVO DUPLO

Modelo	Dimensões				Base	Chumbador	Entre Furos	Divisões	** Tipo De Fundação
	H (mm)	P (mm)	ØD1 (mm)	ØD2 (mm)					
FLANGEADO									
FLPCD04F48	4000	1200	60,3	48,3	200x200	1/2"x300mm	140	4	1
FLPCD05F48	5000	1200	76,2	48,3	200x200	1/2"x300mm	140	4	1
FLPCD04F	4000	1800	76,2	60,3	200x200	1/2"x300mm	140	4	1
FLPCD05F	5000	1800	88,9	60,3	200x200	1/2"x300mm	140	4	1
FLPCD06F	6000	1800	88,9	60,3	258x258	5/8"x300mm	205	4	1
FLPCD07F	7000	1800	101,6	60,3	258x258	5/8"x500mm	205	4	2
FLPCD08F	8000	1800	101,6	60,3	258x258	5/8"x500mm	205	4	2
FLPCD09F	9000	1800	114,3	60,3	278x278	5/8"x500mm	205	4	3
FLPCD10F	10000	1800	114,3	60,3	278x278	5/8"x500mm	205	4	4
FLPCD11F	11000	1800	127	60,3	278x278	5/8"x500mm	205	5	4
FLPCD12F	12000	1800	127	60,3	328x328	3/4"x500mm	260	5	5


Modelo	Dimensões					Divisões
	H (mm)	P (mm)	ØD1 (mm)	ØD2 (mm)	E (mm)	
ENGASTADO						
FLPCD04E48	4000	1200	60,3	48,3	500	4
FLPCD05E48	5000	1200	76,2	48,3	500	4
FLPCD04E	4000	1800	76,2	60,3	500	4
FLPCD05E	5000	1800	88,9	60,3	500	4
FLPCD06E	6000	1800	88,9	60,3	1000	4
FLPCD07E	7000	1800	101,6	60,3	1000	4
FLPCD08E	8000	1800	101,6	60,3	1000	4
FLPCD09E	9000	1800	114,3	60,3	1000	4
FLPCD10E	10000	1800	114,3	60,3	1000	5
FLPCD11E	11000	1800	127	60,3	1000	5
FLPCD12E	12000	1800	127	60,3	1500	5

Modelo	Dimensões		
	Hj (mm)	Cj (mm)	Lj (mm)
FLPCD04_48	600	100	50
FLPCD05_48	600	110	50
FLPCD04_	600	100	50
FLPCD05_	600	110	50
FLPCD06_	600	110	50
FLPCD07_	600	130	70
FLPCD08_	600	130	70
FLPCD09_	600	140	70
FLPCD10_	600	140	70
FLPCD11_	600	140	70
FLPCD12_	600	140	70



*Sob pedido o poste pode ser fabricado com janela de inspeção.

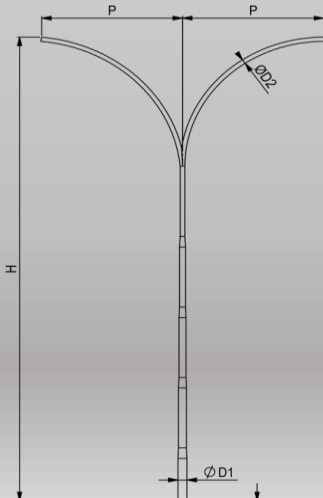

Engastado



Flangeado



**Para tipo de fundação consultar pagina 13